

PRODUCT CATALOG




BT GLO

Table of Contents

BT GLO

LED MODULE	01
SQUARE DOB	06
RIGID BAR	08
PIXEL LIGHT	11
POWER SUPPLY (SMPS)	13
LED TUBELIGHT - BATTEN	19

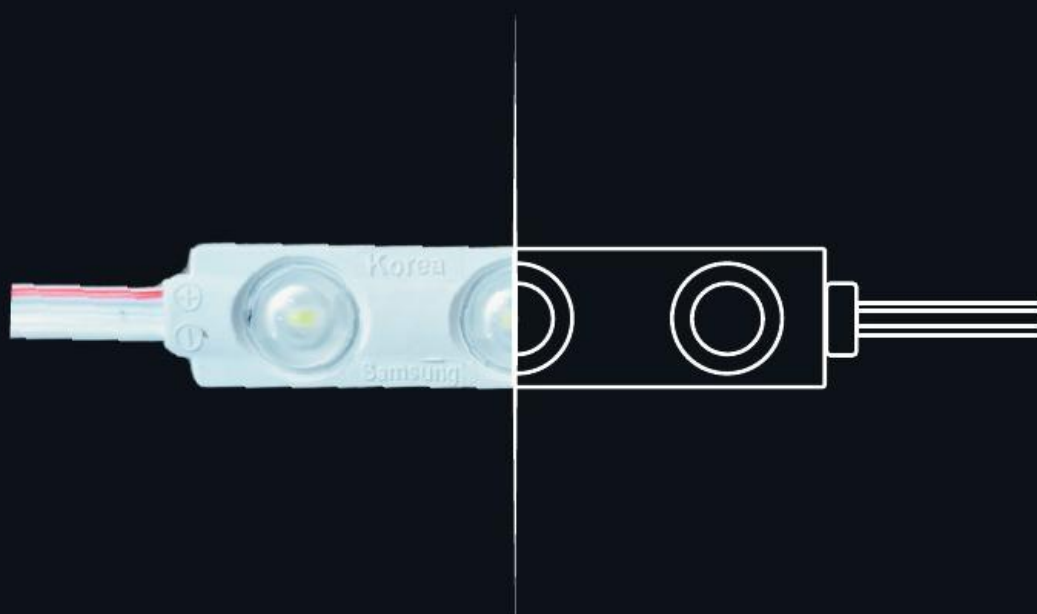


LED MODULE

VEGA 1.8W LED MODULE



Product Specifications:

Size	72 x 16 mm
Power	1.8W
Qty/String	20 Pcs/String
Lumens/Pc	120 Lm/Pc
OP Temperature	-20°C to +80°C

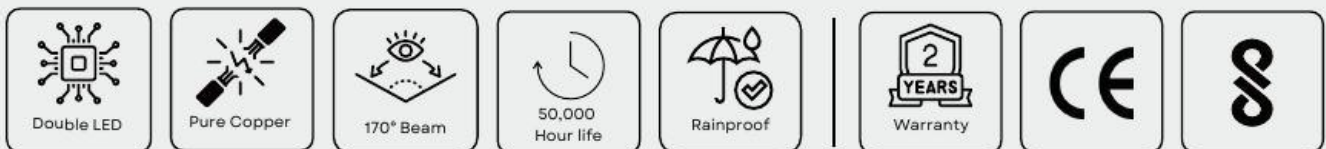


Light Colour Options:




Profile Drawing:

Outside:

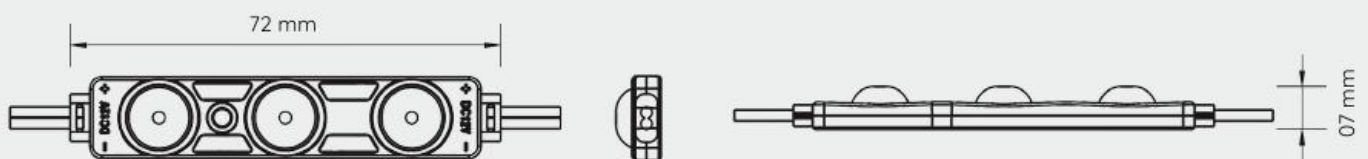

Inside:

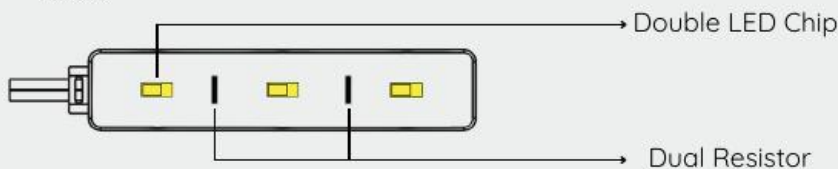

Use Case:



APOLLO SAMSUNG KOREA LED MODULE



Product Specifications:

Size	70 x 15 mm
Power	1.5W
Qty/String	20 Pcs/String
Lumens/Pc	120 Lm/Pc
OP Temperature	-20°C to +80°C



Light Colour Options:




Profile Drawing:

Outside:



Inside:

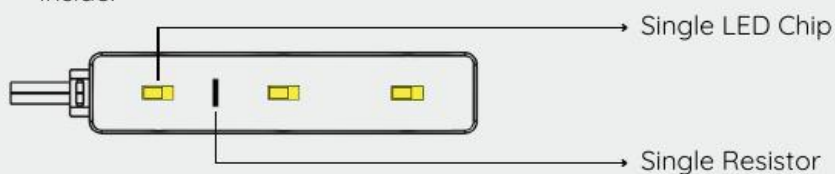

Use Case:



TITAN ECO LED MODULE



Product Specifications:

Size	61 x 13 mm
Power	1.5W
Qty/String	20 Pcs/String
Lumens/Pc	115 Lm/Pc
OP Temperature	-20°C to +80°C




Light Colour Options:




Profile Drawing:


Outside:

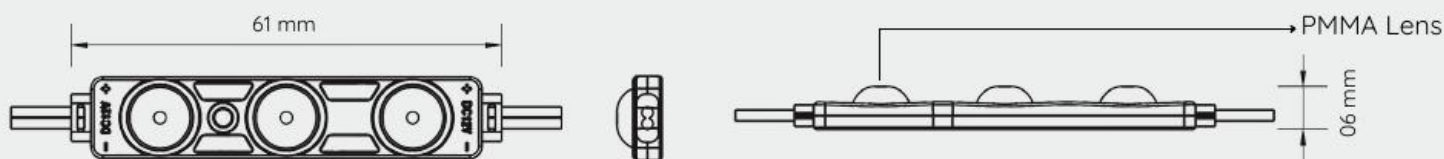

Inside:

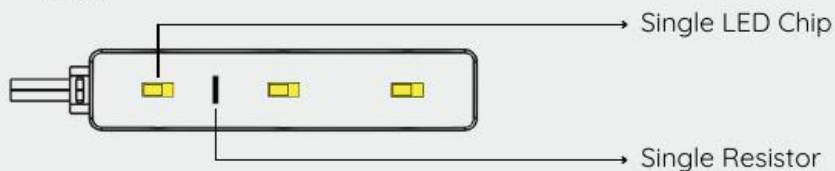

Use Case:

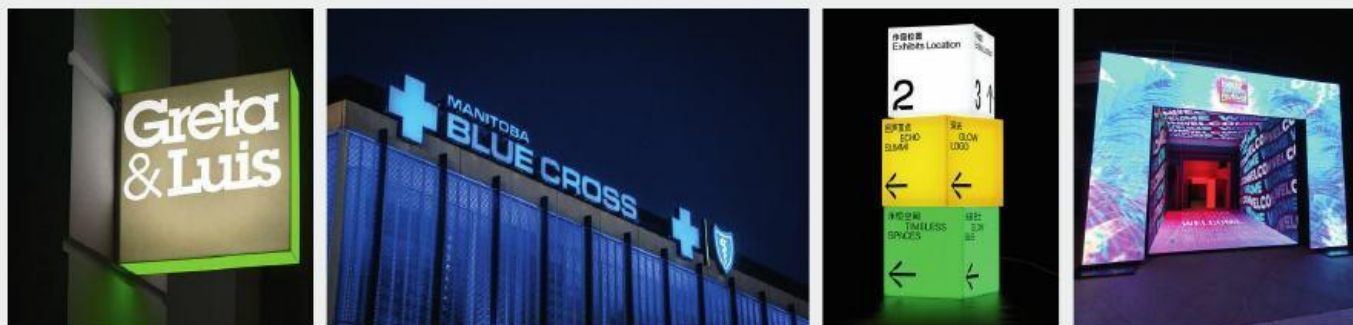


ULTRA 220V LED MODULE



Product Specifications:

Size	72 x 16 mm
Power	2W
Qty/String	20 Pcs/String
Lumens/Pc	120 Lm/Pc
OP Temperature	-20°C to +80°C

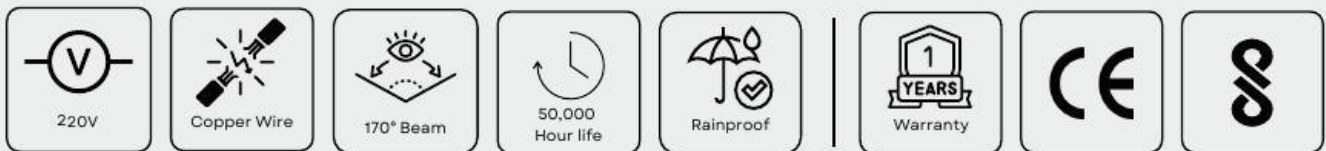


Light Colour Options:



Profile Drawing:

Outside:

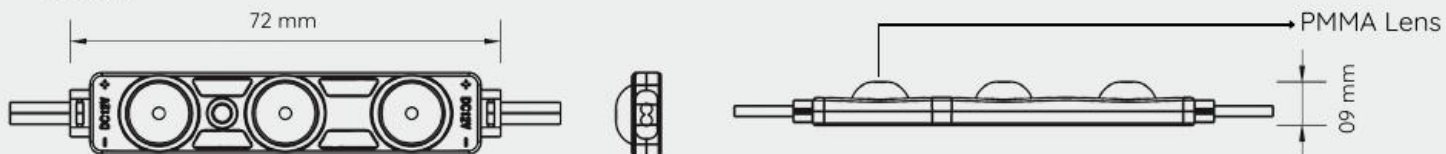

Use Case:




MINI LED MODULE



Product Specifications:

Size	30 x 10 mm
Power	1W
Qty/String	20 Pcs/String
Lumens/Pc	100 Lm/Pc
OP Temperature	-20°C to +80°C



Light Colour Options:



White
10000K



Warm White
3000K



Red
619nm





Green
518nm



Blue
460nm


Profile Drawing:

Outside:

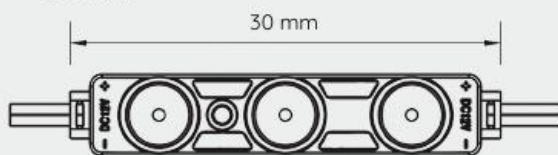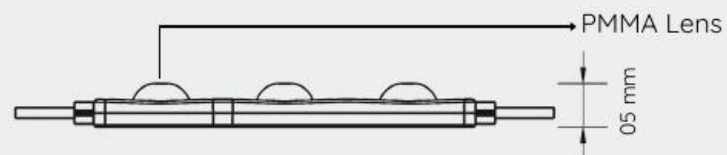

Use Case:



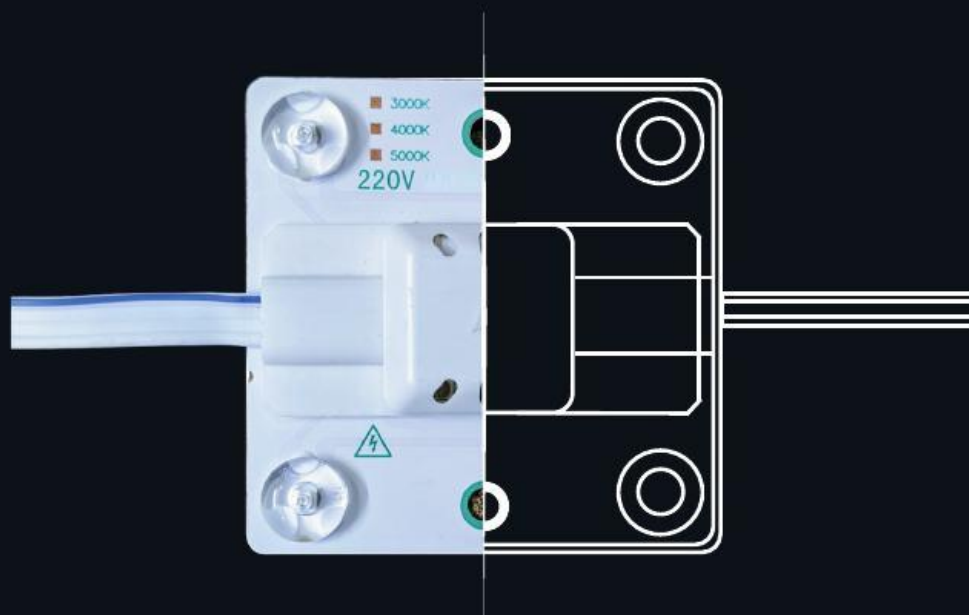


SQUARE
DOB

NEBULA SQUARE DOB



Product Specifications:


Size	70 x 70 mm
Power	4.5W
Qty/String	100 Pcs/String
Lumens/Pc	120 Lm/Pc
OP Temperature	-20°C to +80°C

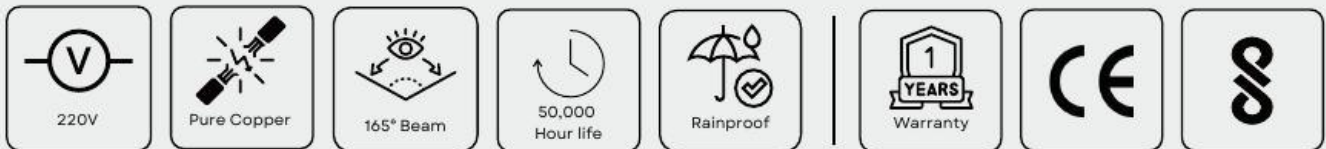

Light Colour Options:



Profile Drawing:

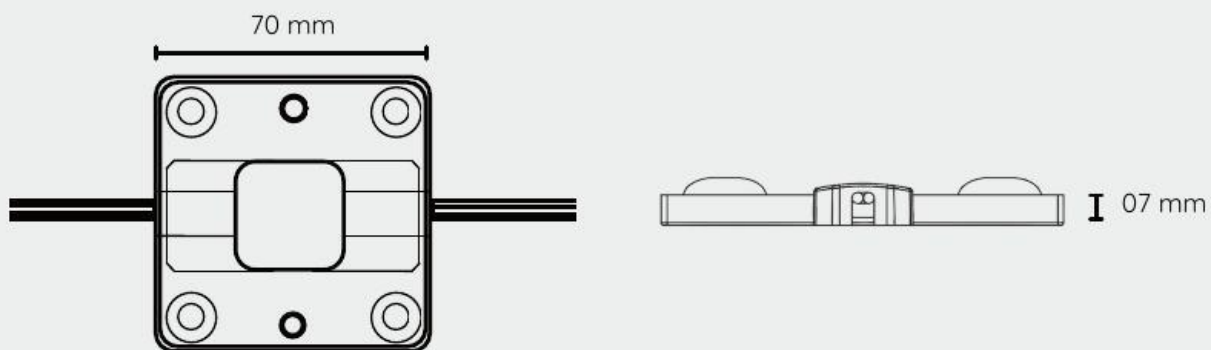

Use Case:



NEBULA SQUARE WATERPROOF DOB



Product Specifications:


Size	70 x 70 mm
Power	4.5W
Qty/String	100 Pcs/String
Lumens/Pc	120 Lm/Pc
OP Temperature	-20°C to +80°C



Light Colour Options:




Profile Drawing:

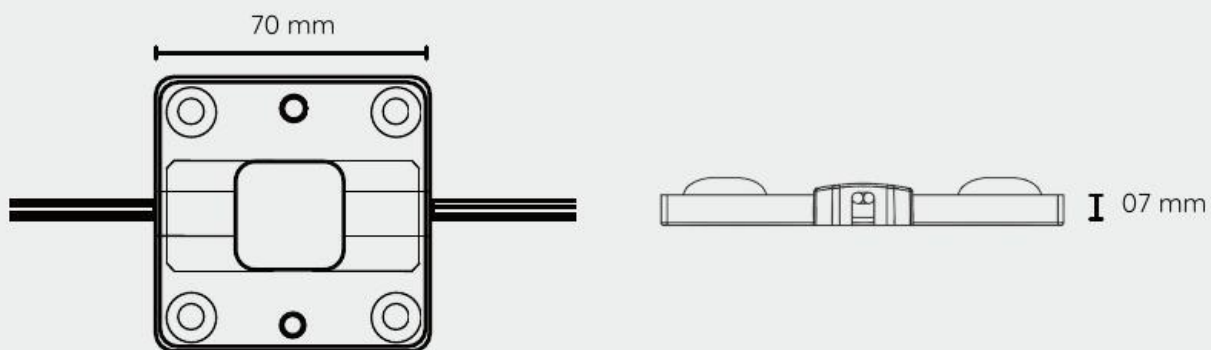

Use Case:



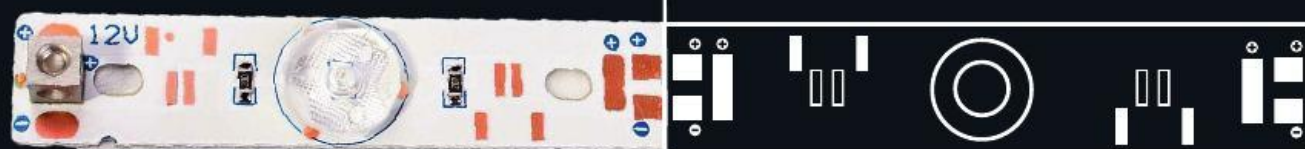

RIGID
BAR

ASTRA RIGID DC BAR



Product Specifications:

Size	950 mm
Power	12W
Lumens/Pc	100 Lm/Pc
OP Temperature	-20°C to +80°C




Light Colour Options:



Profile Drawing:



Use Case:

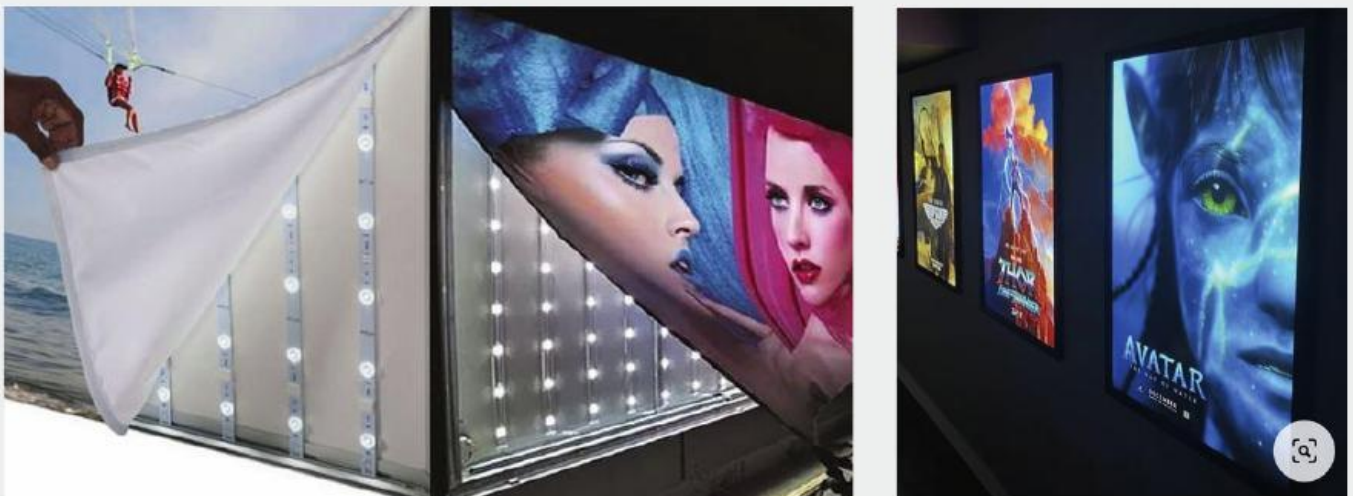

ASTRA DC WATERPROOF RIGID BAR



Product Specifications:


Size	950 mm
Power	12W
Lumens/Pc	100 Lm/Pc
OP Temperature	-20°C to +80°C




Light Colour Options:



Profile Drawing:

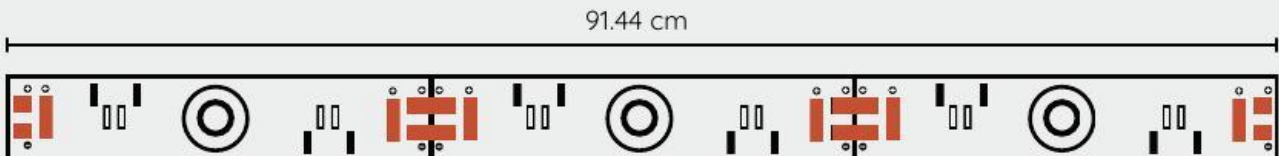

Use Case:

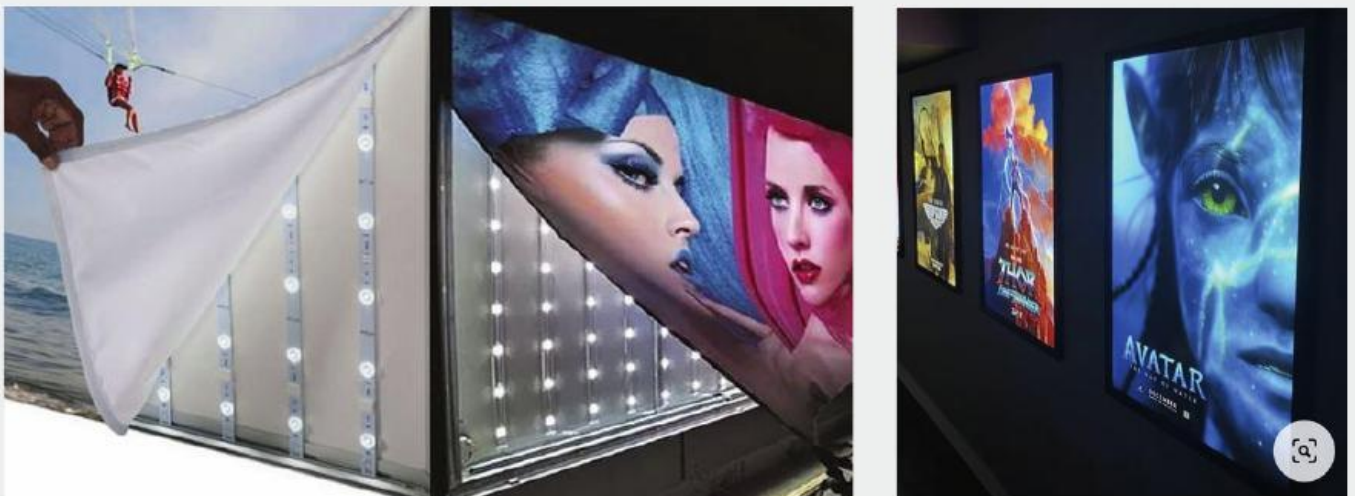


ASTRA DIRECT 220V RIGID BAR



Product Specifications:

Size	950 mm
Power	12W
Lumens/Pc	100 Lm/Pc
OP Temperature	-20°C to +80°C

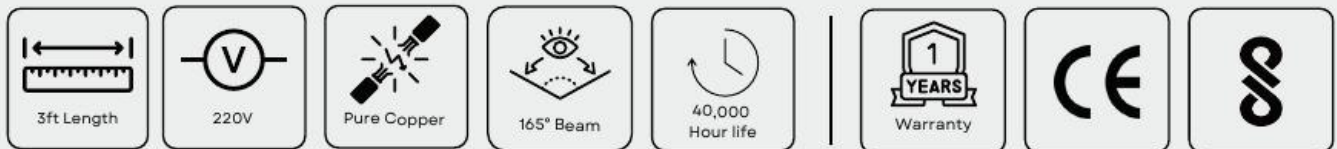

Light Colour Options:



Profile Drawing:



Use Case:








PIXEL LIGHT

AURORA PIXEL LIGHT




Product Specifications:


Size	10 x 10 mm
Power	0.3W/LED
LED/Bunch	50 LEDs/Bunch
Lumens/Pc	30 Lm/Pc
OP Temperature	-20°C to +80°C



Light Colour Options:

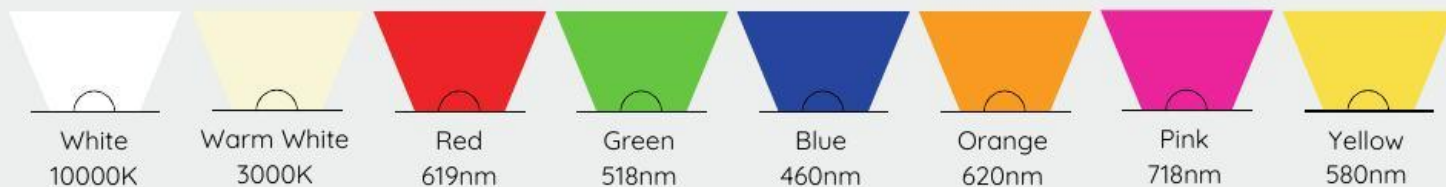

Profile Drawing:

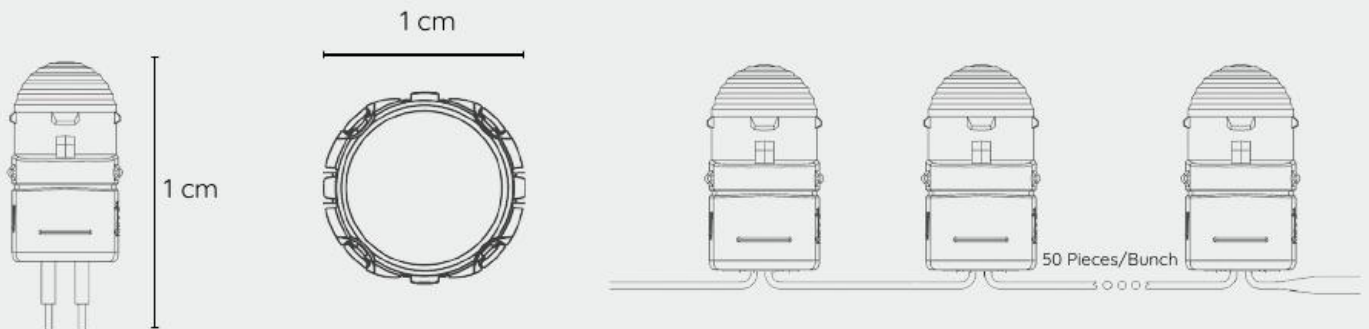

Use Case:



NOVA PIXEL LIGHT



Product Specifications:

Size	10 x 10 mm
Power	0.2W/LED
LED/Bunch	50 LEDs/Bunch
Lumens/Pc	20 Lm/Pc
OP Temperature	-20°C to +80°C



Light Colour Options:



White
10000K



Warm White
3000K



Red
619nm




Green
518nm



Blue
460nm

Profile Drawing:

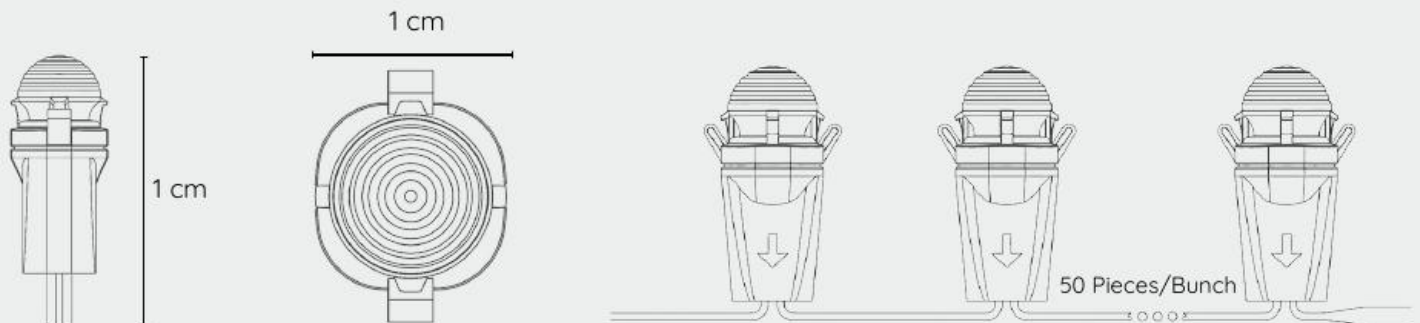

Use Case:





RAINPROOF POWER SUPPLY

Comet Power Supply



Product Specifications:

Input	180V-260V/AC
Output Voltage	12V
Output Current	31.6A
Cooling	Fan
OP Temperature	-30°C to +70°C
Size (LxWxH)	146 x 76 x 47 mm
Installation	Outdoor Rainproof



400 Watt



IP43 Rating



>95% Efficiency



Low Carbon



Rainproof

1 YEARS
Warranty

CE



RoHS

Colour Options:



Bronze

Profile Inside:




- ✓ >95% Efficiency
- ✓ 100% New Components
- ✓ Low Ripple and Noise
- ✓ Thermal Management
- ✓ Full Loading Aging Tested
- ✓ Short Circuit/Over Load Protection

Stellar ECO Power Supply



Product Specifications:

Input	180V-260V/AC
Output Voltage	12V
Output Current	26.3A
Cooling	Fan
OP Temperature	-30°C to +70°C
Size (LxWxH)	165 x 117 x 48 mm
Installation	Outdoor Rainproof



Colour Options:



Bronze

Profile Inside:



- ✓ >75% Efficiency
- ✓ 100% New Components
- ✓ Low Ripple and Noise
- ✓ Good Heat Dispensing
- ✓ Short Circuit/Over Load Protection

Stellar Power Supply



Product Specifications:

Input	180V-260V/AC
Output Voltage	12V
Output Current	26.3A
Cooling	Fan
OP Temperature	-30°C to +70°C
Size (LxWxH)	172 x 118 x 47 mm
Installation	Outdoor Rainproof



400 Watt



IP43 Rating



>75% Efficiency



Low Carbon



Rainproof

1 YEARS
Warranty

CE



RoHS

Colour Options:



Bronze

Profile Inside:



- ✓ >75% Efficiency
- ✓ 100% New Components
- ✓ Low Ripple and Noise
- ✓ Good Heat Dispensing
- ✓ Short Circuit/Over Load Protection

Stellar~~X~~ Power Supply



Product Specifications:

Input	180V-260V/AC
Output Voltage	12V
Output Current	31.6A
Cooling	Fan
OP Temperature	-30°C to +70°C
Size (LxWxH)	182 x 114 x 48 mm
Installation	Outdoor Rainproof



Colour Options:



Bronze

Profile Inside:



- ✓ >95% Efficiency
- ✓ 100% New Components
- ✓ Low Ripple and Noise
- ✓ Thermal Management
- ✓ Full Loading Aging Tested
- ✓ Short Circuit/Over Load Protection

Stellar Aqua Power Supply



Product Specifications:

Input	180V-260V/AC
Output Voltage	12V
Output Current	31.6A
Cooling	Fan
OP Temperature	-30°C to +70°C
Size (LxWxH)	208 x 110 x 50 mm
Installation	Outdoor Waterproof



400 Watt



IP43 Rating



>95% Efficiency



Low Carbon

IP68
WaterProof2
YEARS
Warranty

CE



RoHS

Colour Options:



Grey

Profile Inside:



- ✓ >95% Efficiency
- ✓ 100% New Components
- ✓ Low Ripple and Noise
- ✓ Thermal Management
- ✓ Full Loading Aging Tested
- ✓ Short Circuit/Over Load Protection

Lunar Power Supply



Product Specifications:

Input	180V-260V/AC
Output Voltage	12V
Output Current	31.6A
Cooling	Fan
OP Temperature	-30°C to +70°C
Size (LxWxH)	206 x 120 x 58 mm
Installation	Outdoor Rainproof



Colour Options:




Bronze

Profile Inside:



- ✓ >95% Efficiency
- ✓ 100% New Components
- ✓ Low Ripple and Noise
- ✓ Thermal Management
- ✓ Full Loading Aging Tested
- ✓ Short Circuit/Over Load Protection

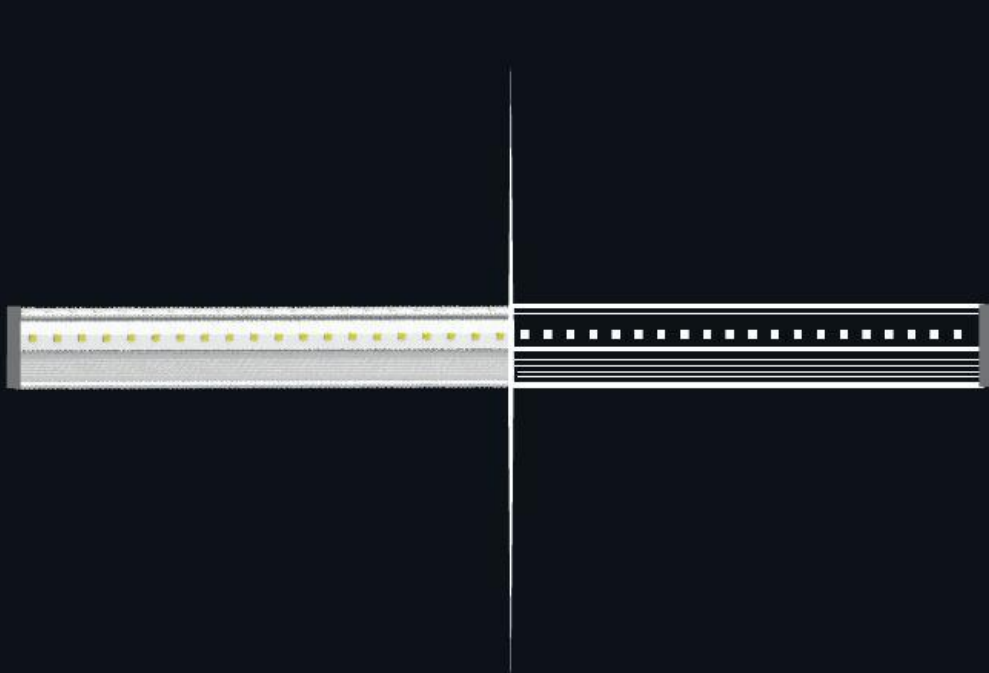

LED
TUBE LIGHT

Square Tubelight



Product Specifications:

Shape	Square
Range	165v - 330v
Current	140ma
Lumens	100LM
Size (LxWxH)	1180 x 22 x 38 mm
Installation	Indoor & Outdoor




Colour Options:



White - 6000K

Profile Drawing:

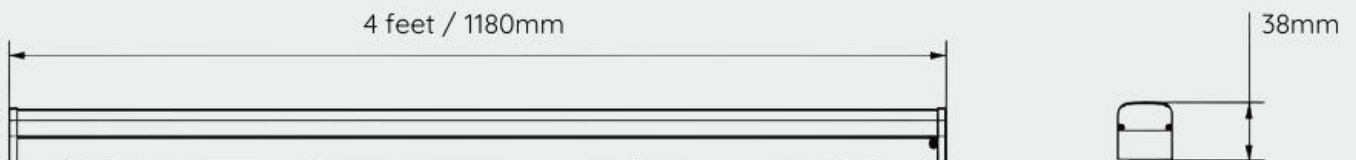

Use Case:



Round Tubelight



Product Specifications:

Shape	Round
Range	165v - 330v
Current	140ma
Lumens	100LM
Size (LxWxH)	1180 x 22 x 38 mm
Installation	Indoor & Outdoor




Colour Options:



White - 6000K

Profile Drawing:

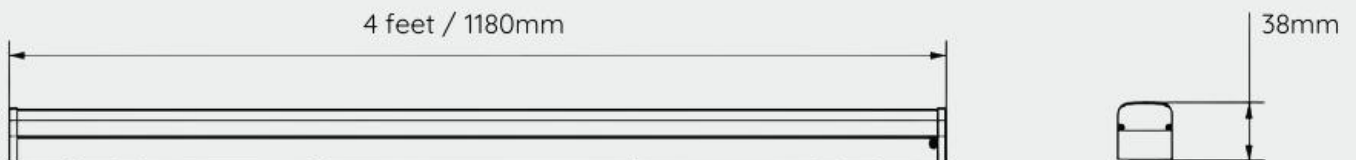

Use Case:



Questions? Contact Us



43/64, Sattanan Naicken Street, Choolai
Chennai, Tamil Nadu -600012



+91 89396 77684 | +91 98409 31603



info@btglo.in



www.btglo.in